

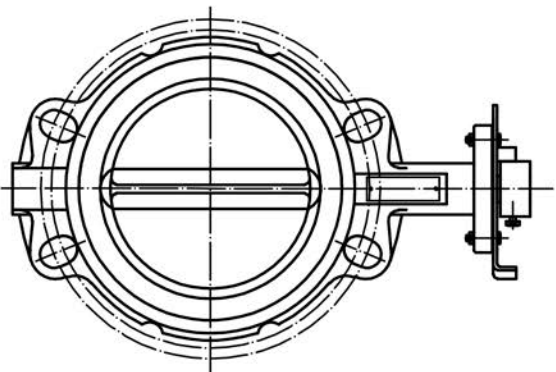


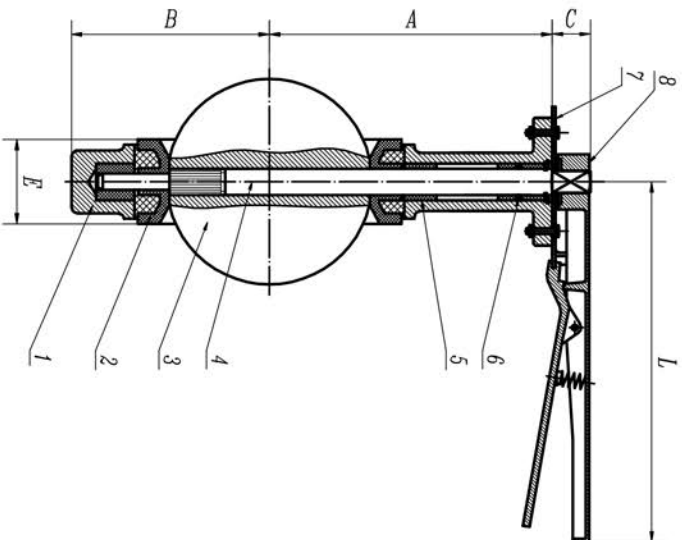



Stroke Actuator	SIZE	A	B	C	E	ØD	ød	4-ødo	HxH	L
	DN40	120	75	28	33	77	50	7	11x11	264
AP2DA	DN50	124	80	28	43	77	50	7	11x11	264
	DN65	134	89	28	46	77	50	7	11x11	264
	DN80	141	95	28	46	77	50	7	11x11	264
AP3DA	DN100	156	114	28	52	92	70	10	14x14	264
	DN125	168	127	28	56	92	70	10	14x14	264
AP4DA	DN150	184	140	28	56	92	70	10	17x17	264
AP4.5DA	DN200	213	175	34	60	125	102	12	22x22	364
AP5DA	DN250	244	220	36	68	125	102	12	22x22	504
AP6DA	DN300	283	255	36	78	*150	125	*14	27x27	

8	Handle	1	Malleable iron
7	Plate	1	Carbon steel
6	O-Ring	1	NBR
5	Bushing	4	PTFE
4	Shaft	1	SS AISI 410
3	Disc	1	CF8M
2	Seat	1	EPDM
1	Body	1	FC250
Item	Part Name	QTY.	Materials

Butterfly valve wafer Type
Lever Operated

DN40mm.-DN300mm.

- 1. Working pressure: 16bar.
- 2. F to F DIM. ACC. to ISO5211/EN558-1 Basic SERIES 20.
- 3. Top-Flange ACC. to ISO5211
- 4. Fitting between flanges DIN2501 PN10/PN16. ANSI 125/150. JIS 5K/10K.

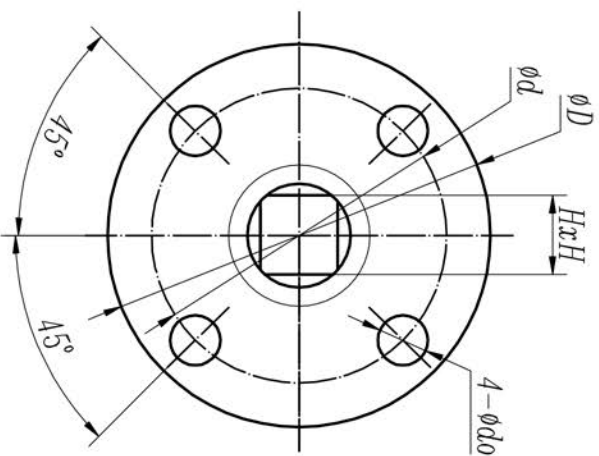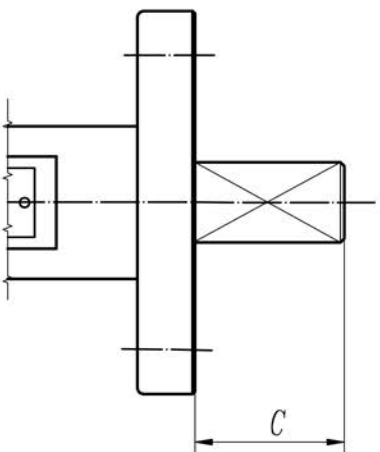

Sirea Actuator	SIZE	øD	ød	4-ødo	*HxH	*C
AP2DA	DN40	77	50	7	11x11	28
	DN50	77	50	7	11x11	28
	DN65	77	50	7	11x11	28
	DN80	77	50	7	11x11	28
	DN100	92	70	10	14x14	28
	DN125	92	70	10	14x14	28
AP3DA	DN150	92	70	10	17x17	28
AP4DA	DN200	125	102	12	22x22	34
AP4.5DA	DN250	125	102	12	22x22	36
AP5DA	DN300	*150	125	*14	27x27	52
AP6DA	DN350	*150	125	*14	27x27	52
AP8DA	DN400	210	140	18	36x36	52
	DN450	210	140	18	36x36	52
	DN500	210	140	18	36x36	65
AP10DA	DN600	210	165	22	46x46	70

Butterfly valve wafer Type Bareshaft Operated DN40mm.-DN600mm.